



Nota applicativa cod. i0001

Data Integrity

rev. 01 - 02/2021



In order to guarantee correct, traceable and non-alterable management of the stored data, the HyAS air sampler has the following features:

- Three levels access control
- Report generated on a PDF file
- Uniqueness of the report
- Data storage
- Save data on a USB 2.0 stick

Three levels access control

The definition of three user levels permits a separated access to the instrument functions. The access to a function is protected by a modifiable password.

The three levels are defined as follows:

Level	Description	
1	Simple User	
2	SuperUser	
3	Administrator	

The higher the level, the more functions are enabled.

The instrument will ask for a numeric password (4-digit) any time the user will try to use a function no permitted by his role.


In the following table it is shown all the operations that a user can perform according to his level.

Operation		Enabled Level		
	1	2	3	
Start a sampling with the displayed volume	√	√	√	
Select programmed volume/multiphase cycle	NO	√	√	
Modify date and time		√	√	
Set up a delay	NO	√	√	
Export data to USB stick	NO	√	√	
Modify programmed volume/multiphase cycle	NO	NO	√	
Set/Modify password		NO	√	
Delete data (only those older than two years)		NO	√	

2 rev. 00 - 06/2020

Report generated on a not modifiable PDF-file

Every completed sampling is saved in the instrument memory. It is possible to export the data in a not-modifiable PDF file.

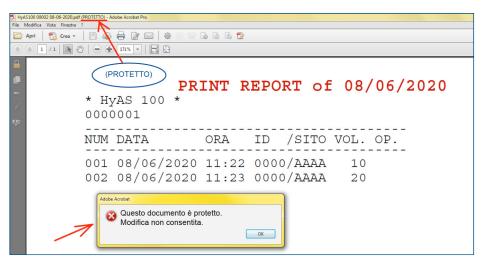


Each report includes the unique information related to the executed sampling.



Uniqueness of the report

In order to ensure the uniqueness of the report, every time a counter is included in the file name every time the report is generated. For example:

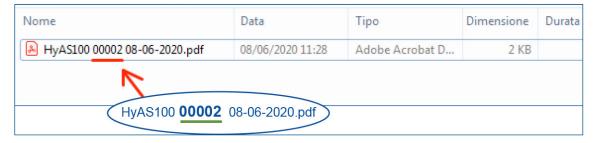

Data storage

The sampling data saved in the instrument memory are stored **for two years**

During this period it is not possible to delete them.



It is possible to export the stored data on a USB 2.0 Stick.



rev. 00 - 06/2020 3